




▶ CORTE Y ESTAMPADO

INSERTO BUJE GUIA
PUNZON CON CABEZA
DIN 172 (CODIGO GP)

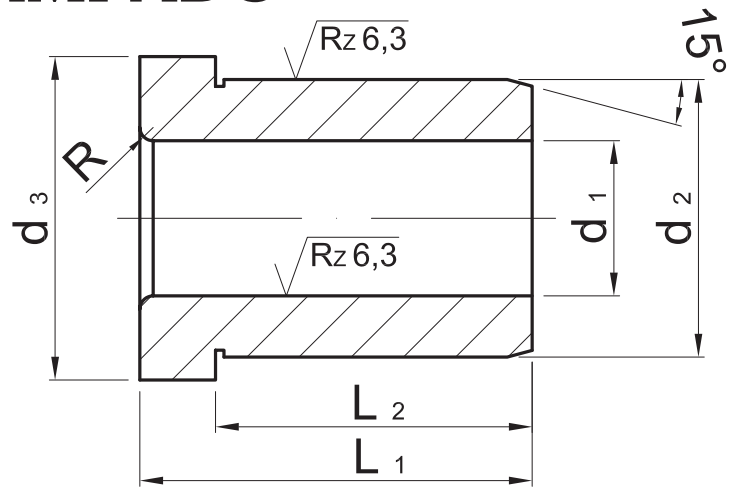

▶ CARACTERÍSTICAS

Código Solicitud:

GP ($d_1 \times L_1$)

Acero: 88 MN V8

Dureza: 60 - 62 HRC

Ejecución:

Templado - Revenido

Rectificado - Lapeado

Diámetros mayores a pedido

d1 F7	d2 N6	d3	Corto		Largo	
			L1	L2	L1	L2
2 - 2.6	5	8	6	4	9	7
2.7 - 3.3	6	9	8	5.5	12	9
3.4 - 4.0	7	10	8	5.5	12	9
4.1 - 5.0	8	11	8	5.5	12	9
5.1 - 6.0	10	13	10	7	16	13
6.1 - 8.0	12	15	10	7	16	13
8.1 - 10	15	18	12	8	20	16
10.1 - 12	18	22	12	8	20	16
12.1 - 15	22	26	16	12	28	24
15.25 - 18	26	30	16	12	28	24
18.25 - 22	30	4	20	15	36	31
22.25 - 26	35	39	20	15	36	31
26.25 - 30	42	46	20	15	36	31
30.25 - 35	48	52	25	20	45	40
35.5 - 42	55	59	25	20	45	40
42.5 - 48	62	66	30	24	56	50
48.5 - 55	70	74	30	24	56	50
56 - 62	78	82	35	29	72	66

